

Features


- White finish, wall or ceiling mount
- ETL listed, 4' unit DLC approved
- 3500k, 4000k & 5000k
- 0-10v Dimmable

Specifications

- 120-277v standard.
- Long life LEDs coupled with 120-277v high efficiency drivers provide quality illumination. Rated at 50,000 hours. CRI>80 / 60Hz.
- White painted steel housing with knockouts provided on end and back of housing. Provided mounting provisions.
- Average of 125 + lumens per watt.
- Fixture is designed for wall or ceiling mount.
- Operating temperature -4° to +104° F
- Acrylic lens

Application

- Commercial/Residential
- Corridors
- Bathrooms
- Hospitals
- Elder care facilities
- Hotel and motel facilities

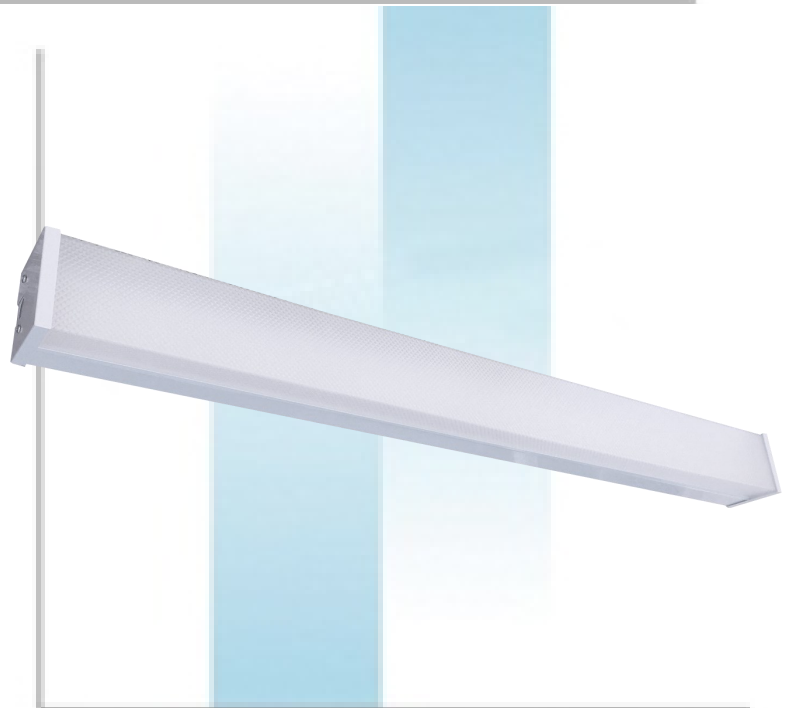

Accessories/Options


- Emergency battery pack

Catalog Number	Type



LED 900 Series

Dimensions are subject to change.
Consult factory for verification.
All configurations may not be shown.

Dimensions

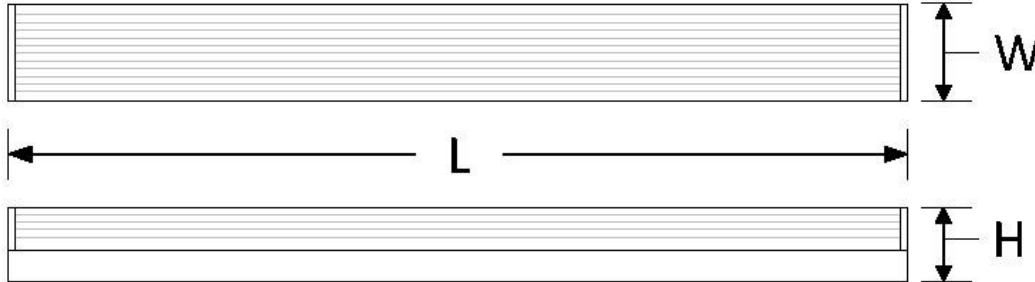

L	W	H
46 3/8"	4 1/8"	3 7/8"

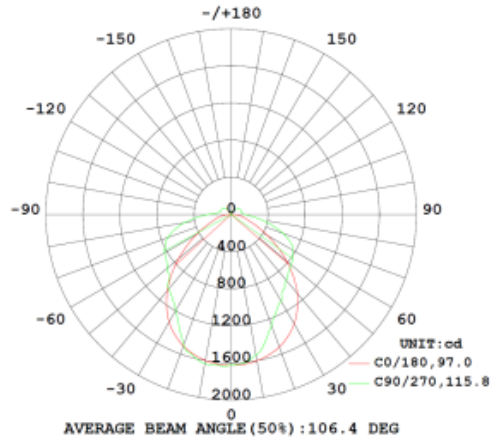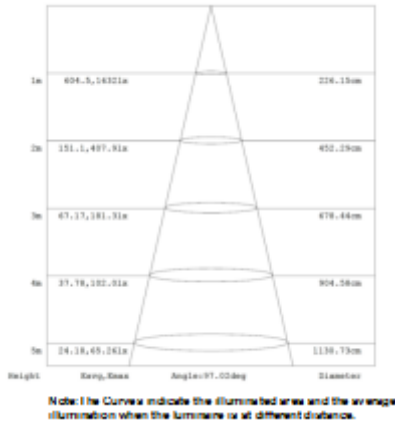

Ordering Information

Example: LED-948-36W-4K

