

LED SLT Grid Troffer

Center Basket Direct/Indirect T-bar LED Luminaire

Features

- Premium grade, recessed
- Lay-in direct indirect.
- Perforated metal center basket for glare-free lighting
- UL listed, Led driver and module kits are DLC listed.
- Available in 2x2 & 2x4
- 3500k,4000k & 5000k
- 0-10v Dimmable

Specifications

- 120-277v HPF / 50,000 hrs / 100+ lumens per watt / CRI >80.
- Driver max case temperature 194° F/ 90° C / THD: <20%. Board max temperature 185° F/ 85° C .
- Housings are formed from cold rolled steel and painted with a high-gloss, baked white enamel finish after multi-stage cleaning and a phosphate coating to inhibit rust, has been applied.
- Fixture is designed for T-bar.
- Visible reflectance surface is painted with flat white enamel for a soft appearance.
- Perforated metal basket has an acrylic inlay to diffuse the light.

Application

- Commercial/Residential
- Classrooms
- Offices
- Retail Stores
- Libraries



Accessories

- Emergency battery pack
- Flange kits for dry wall installation

Catalog Number	Type

LED SLT Grid Troffer

Direct/Indirect

Dimensions and specifications are subject to change. Consult factory for verification.

Dimensions


Side View



Side View



End View

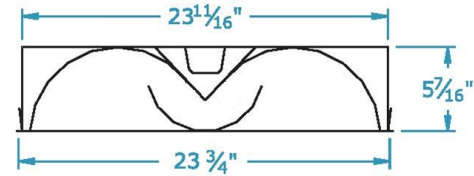

Ordering Information

Example: LEDK-SLT-22-36W-4K

