

Features

- White finish, wall or ceiling mount
- UL listed, Drive and module kits are DLC approved
- 3500k, 4000k & 5000k
- Available in 2' or 4'
- 0-10v Dimmable

Specifications

- 120-277v HPF / 50,000 hrs / 100+ lumens per watt / CRI >80.
- Driver max case temperature 194° F / 90° C / THD: <20%. Board max temperature 185° F / 85° C .
- Housings are formed from cold rolled steel and painted with a high-gloss, baked white enamel finish after multi-stage cleaning and a phosphate coating to inhibit rust, has been applied.
- Fixture is designed for wall or ceiling mount.
- Standard diffuser is 100% virgin acrylic with an opaque inlay for even light distribution.

Application

- Commercial/Residential
- Corridors
- Bathrooms
- Hospitals
- Elder care facilities
- Hotel and motel facilities



Accessories/Options

- Emergency battery pack




Catalog Number	Type

LED 902 Series

Dimensions are subject to change.
Consult factory for verification.
All configurations may not be shown.

Dimensions

Back View

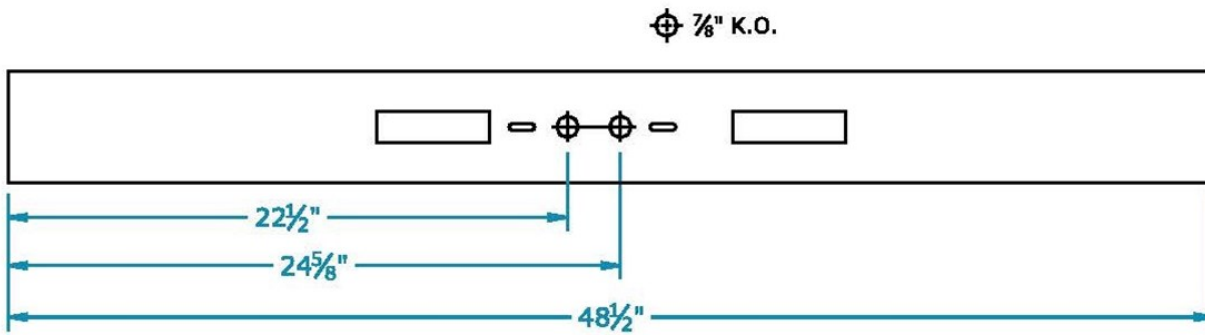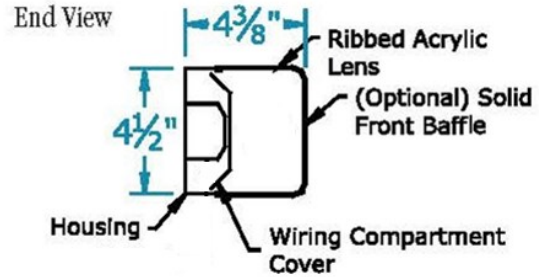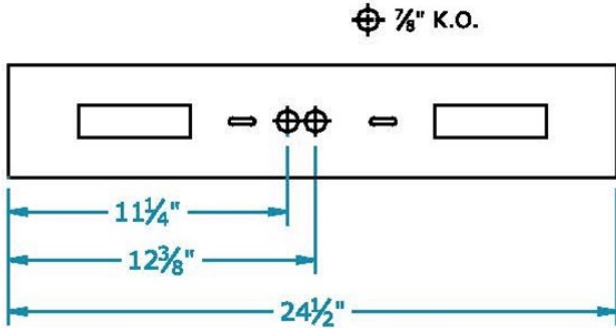

Ordering Information

Example: LEDK-902-36W-4K

