

## Features

- Single, basket-shaped perforated metal shield with an integrated metal cross blade baffle
- Suitable for row mounting
- UL listed, Driver & module kits are DLC approved
- 3500k, 4000k & 5000k
- 0-10V Dimmable

## Specifications

- 120-277v HPF / 50,000 hrs / 100+ lumens per watt / CRI >80.
- Driver max case temperature 194° F/ 90° C / THD: <20%. Board max temperature 185° F/ 85° C .
- Housings are roll formed steel with white polyester powder painted visible surfaces.
- Surface, cable or pendant mounting.
- Row mountable
- Optical system, basket shield for direct /indirect illumination contains a white opal acrylic overlay diffuser for visual comfort. Indirect louvers are precision formed and contoured to provide soft, low glare, indirect illumination, while maintaining high-efficiency and a wide uniform light distribution while providing 55% down light and 45% up light.

## Application

- Commercial/Residential
- High-end garages
- Libraries
- Offices & conference rooms



## Accessories


- Emergency battery pack
- Cable hanging kits

Catalog Number	Type

# LED Frisco Direct/Indirect Linear

Dimensions and specifications are subject to change. Consult factory for verification.

## Dimensions

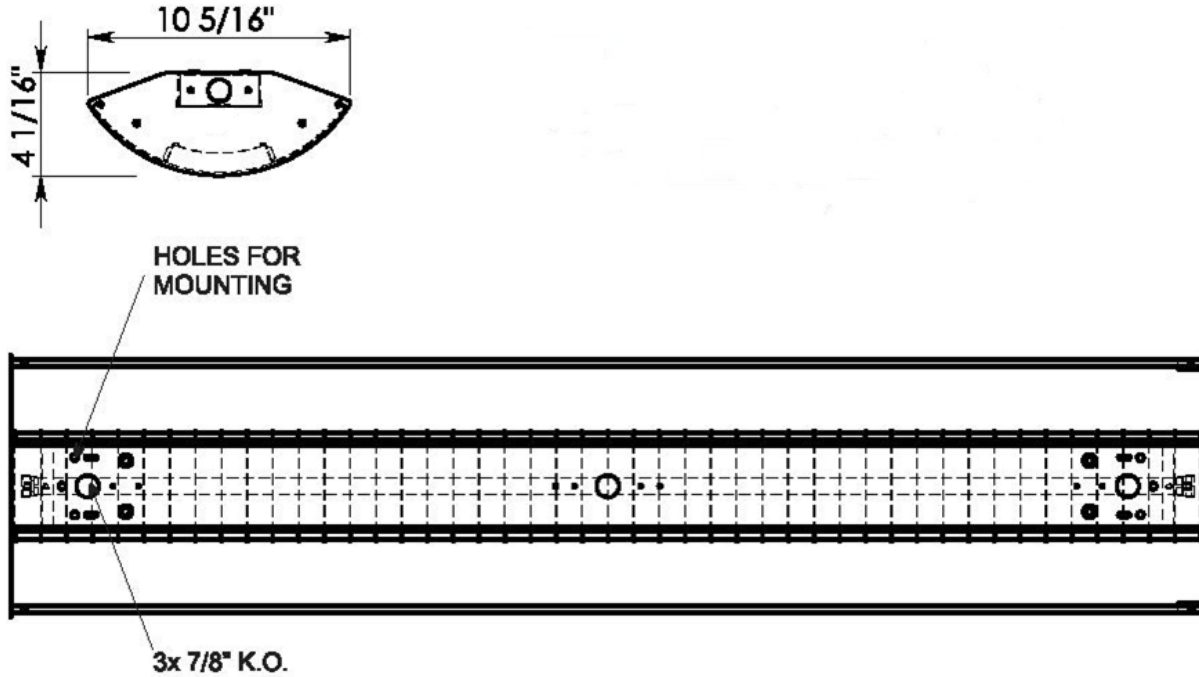

## Ordering Information

Example: LEDK-FR-44W-4K

