

# LED Wrap Fixture

**Integrated LED wrap fixture**

## Features

---

- 9", 11" & 16" wide
- Lift and shift lens mounting from either side
- UL listed, LED driver and module kits are DLC listed
- 3500k, 4000k & 5000k
- 0-10v Dimmable

## Specifications


---

- 120-277v HPF / 50,000 hrs / 100+ lumens per watt / CRI >80.
- Driver max case temperature 194° F / 90° C / THD: <20%. Board max temperature 185° F / 85° C .
- Housings are formed from cold rolled steel and painted with a high-gloss, baked white enamel finish after multi-stage cleaning and a phosphate coating to inhibit rust, has been applied.
- Fixture is designed for ceiling mount.
- Diffuser is 100% virgin acrylic that is of a lift and shift design for easy servicing.

## Application

---

- Commercial/Residential
- Offices
- Kitchens
- General Lighting

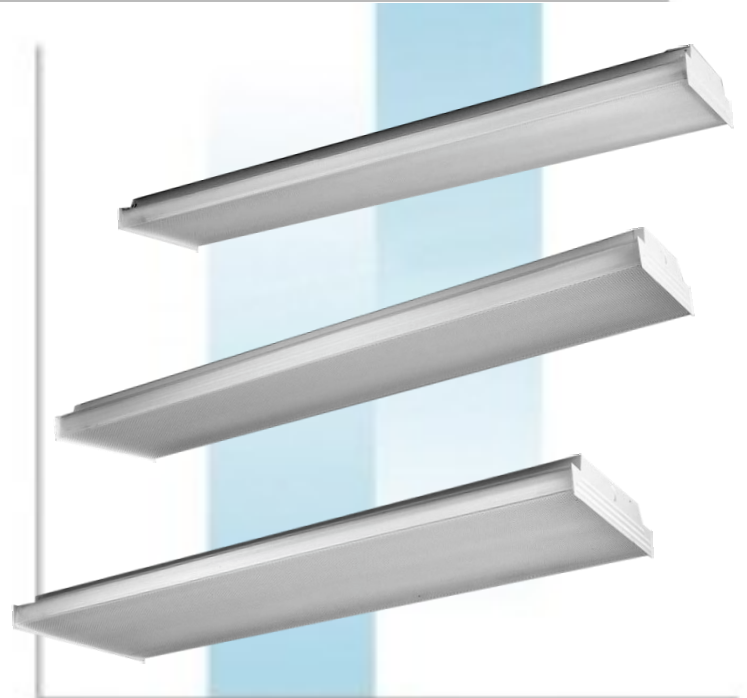

## Options

---

- Emergency battery pack (4' fixture only)

Catalog Number	Type

