

Features


- White finish surface mount
- UL listed, Ballast driven or Direct Drive LED lamps are DLC approved
- 3500k, 4000k & 5000k
- 4000k Direct Drive
- 0-10v Dimming option (with ballast)

Specifications

- 120-277v ballasts are thermally protected Class P, non-PCB and UL listed. And sound rated "A".
- Housings are formed from cold rolled steel and painted with a high-gloss, baked white enamel finish after multi-stage cleaning and a phosphate coating to inhibit rust, has been applied.
- Fixture is designed for ceiling mount.
- Door has mitered corners and hinges from either side.
- Installed LED lamps operate from electronic ballast. Direct Drive LED lamps are line voltage.
- Standard diffuser is 100% virgin acrylic.
- CRI>83 / 100+ lumens per watt.

Application

- Commercial/Residential
- Classrooms
- Offices
- Retail Stores
- Libraries

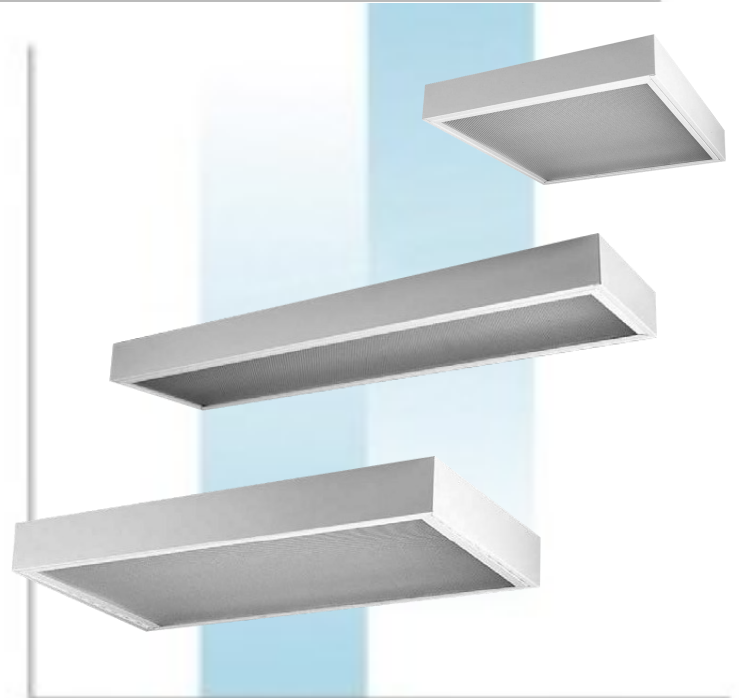

Accessories/Options


- Emergency battery pack (with ballast)
- Dual Ballasts
- 0-10v dimming (with ballast)

Catalog Number	Type

LED Lamped 800 Series

Dimensions are subject to change.
Consult factory for verification.
All configurations may not be shown.

Dimensions

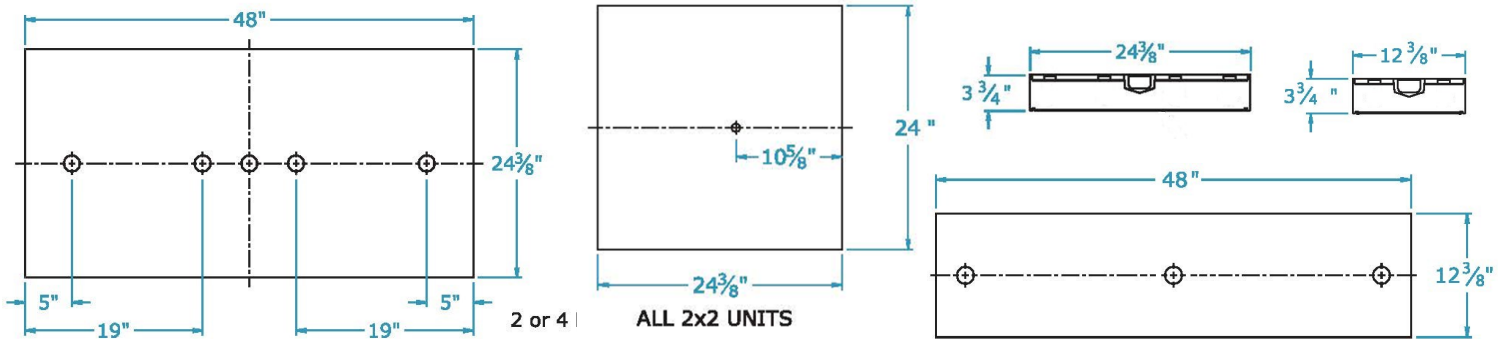

LED T8 LAMPS

AVERAGE SYSTEM WATTS

INITIAL LUMENS PER LAMP

COLOR TEMP (k)	LOW BALLAST FACTOR (0.78)	NORM BALLAST FACTOR (0.88)	HIGH BALLAST FACTOR (1.18)	LOW BALLAST FACTOR (0.78)	NORM BALLAST FACTOR (0.88)	HIGH BALLAST FACTOR (1.18)
2' 3500k	8 w	9 w	13 w	950	1100	1600
2' 4000k	8 w	9 w	13 w	950	1100	1600
2' 5000k	8 w	9 w	13 w	950	1100	1600
4' 3500k	15 w	18 w	23 w	1800	2200	2800
4' 4000k	15 w	18 w	23 w	1800	2200	2800
4' 5000k	15 w	18 w	23 w	1800	2200	2800

DIRECT DRIVE LED T8 LAMPS

INPUT VOLT-	POWER CONSUMPTION	POWER FACTOR	INPUT CURRENT	LUMENS PER LAMP
2' 120-277Vac	7W	>0.9	0.06A @ 120V / 0.03A @ 277V	900 LM
4' 120-277Vac	18W	>0.9	0.15A @ 120V / 0.07A @ 277V	1900 LM

Ordering Information

Example: LED4K-822-SA1-317 XV

