

LED 602 Industrial Series

Ballast Driven LED lamped Industrial Strip Fixture

Features

- White finish, surface or chain mount
- 4' & 8' lengths available
- Reflectors attach with 1/4 turn fasteners
- UL listed, Ballast Driven LED lamps are DLC approved
- 3500k, 4000k & 5000k

Specifications

- 120-277v ballasts are thermally protected Class P, non-PCB and UL listed. And sound rated "A".
- Housings are formed from cold rolled steel and painted with a high-gloss, baked white enamel finish after multi-stage cleaning and a phosphate coating to inhibit rust, has been applied.
- Fixture is designed for surface, pendant or chain mounting.
- Reflectors are formed with lateral embossments and a return flange for strength and rigidity.
- Installed LED lamps operate from Electronic ballast.

Application

- Commercial/Residential
- Warehouses
- Production Areas
- General Lighting
- Garages

Options

- Dual level wiring
- 3500k, 4000k, 5000k
- 0-10v Dimming



Accessories

- Emergency battery pack
- Stems/canopy
- V-hooks
- Wire guard
- Occupancy sensor

Catalog Number	Type



LED 602 Industrial Series

4' OR 8' CHANNELS


Dimensions

Dimensions are subject to change.
Consult factory for verification.
All configurations may not be shown.

Back View

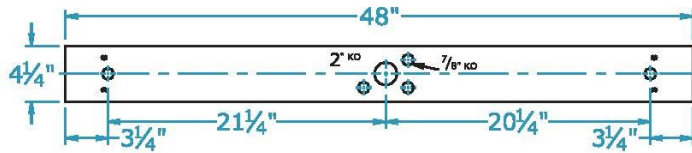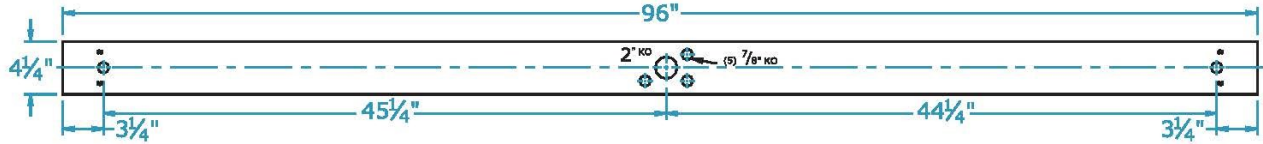

End View

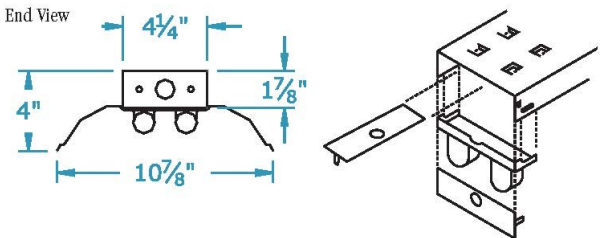

LED T8 LAMPS

AVERAGE SYSTEM WATTS

INITIAL LUMENS PER LAMP

COLOR TEMP (k)	LOW BALLAST FACTOR (0.78)	NORMAL BALLAST FACTOR (0.88)	HIGH BALLAST FACTOR (1.18)	LOW BALLAST FACTOR (0.78)	NORMAL BALLAST FACTOR (0.88)	HIGH BALLAST FACTOR (1.18)
3500k	15 w	18 w	23 w	1800	2200	2800
4000k	15 w	18 w	23 w	1800	2200	2800
5000k	15 w	18 w	23 w	1800	2200	2800

Ordering Information

Example: LED4K-6T4-32-8 XV

