

LED Frisco Architectural Linear

1,2 or 3 lamp cross section

Features

- Single, basket-shaped perforated metal shield with an integrated metal cross blade baffle
- Suitable for row mounting
- UL listed, LED lamps are DLC approved
- 3500k, 4000k & 5000k

Specifications

- 120-277v ballasts are thermally protected Class P, non-PCB and UL listed. And sound rated "A".
- Housings are roll formed steel with white polyester powder painted visible surfaces.
- Surface, cable or pendant mounting.
- LED lamps operate from instant start ballast.
- Row mountable
- Optical system, basket shield for direct /indirect illumination contains a white opal acrylic overlay diffuser for visual comfort. Indirect louvers are precision formed and contoured to provide soft, low glare, indirect illumination, while maintaining high-efficiency and a wide uniform light distribution while providing 55% down light and 45% up light.



Application

- Commercial/Residential
- High-end garages
- Libraries
- Offices & conference rooms

Options

- Dual level wiring
- 3500k, 4000k, 5000k
- Dimming

Accessories

- Emergency battery pack
- Cable hanging kits


Catalog Number	Type

LED Frisco Architectural Linear


1,2 or 3 lamp cross section

Dimensions are subject to change.
Consult factory for verification.
All configurations may not be shown.

Dimensions



HOLES FOR MOUNTING

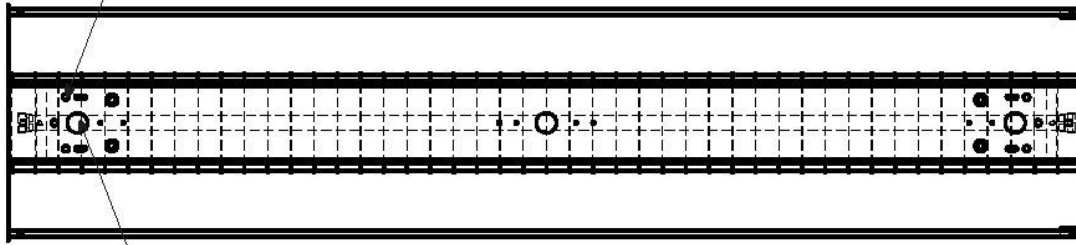

3x 7/8" K.O.

Product Details

Dimensions

LED T8 LAMPS

COLOR TEMP (k) Lamp length	AVERAGE SYSTEM WATTS			INITIAL LUMENS PER LAMP		
	LOW BALLAST FACTOR (0.78)	NORMAL BALLAST FACTOR (0.88)	HIGH BALLAST FACTOR (1.18)	LOW BALLAST FACTOR (0.78)	NORMAL BALLAST FACTOR (0.88)	HIGH BALLAST FACTOR (1.18)
3500k	15 w	18 w	23 w	1800	2200	2800
4000k	15 w	18 w	23 w	1800	2200	2800
5000k	15 w	18 w	23 w	1800	2200	2800

Ordering Information

Example: LED35K-FR-4T32-8 XV

