

## Features

- Fixture is linkable and can be hard wired or used with a power cord
- Dimmable
- UL listed
- Installed rocker switch
- White finish with smooth white lens

## Specifications

- Input voltage: 120VAC, 60Hz
- Input current: 150mA +/- 10%
- Lifetime: >36000 hours
- Ambient Temperature: -20°C to +50°C
- CRI: >80
- CCT: 4000K

## Application

- Commercial/Residential
- Kitchens
- Under Cabinets
- Closets
- Display Cases



## Accessories

- 6" Connector
- 39" Power Cord
- Knock-out Connector


Catalog Number	Type

# LED TI Under Cabinet

5 Length Options

## Dimensions

Dimensions are subject to change.  
Consult factory for verification.  
All configurations may not be shown.

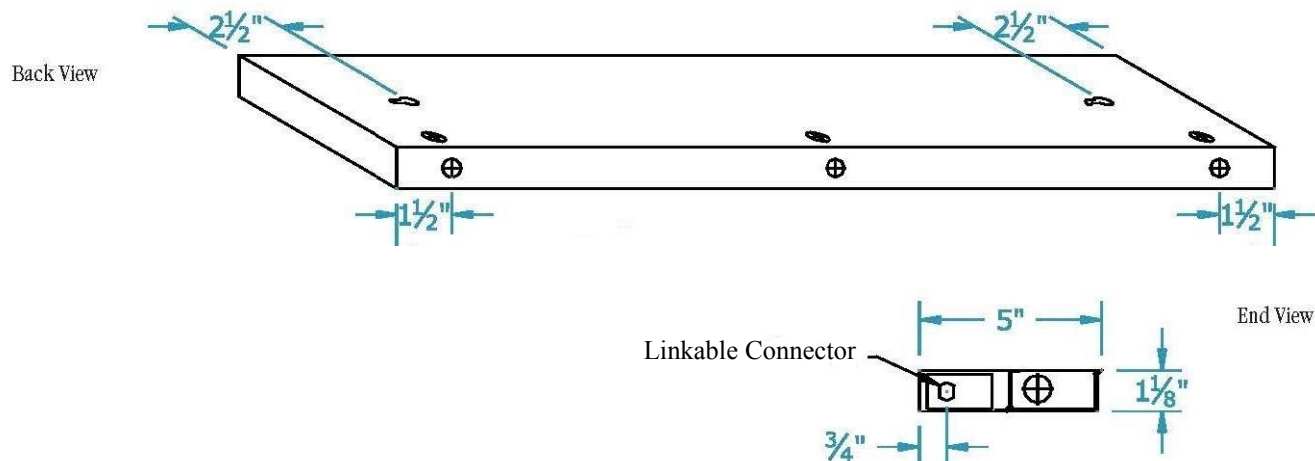

### Accessories



Knock-out connector



39" power cord



6" connector

### Ordering Information

Model #	Nom. Length	Width	Height	Input Power	Lumens	PF
LED-TI-12" 4K	12"	5"	1 1/8"	6W	360lm	>0.9
LED-TI-18" 4K	18"	5"	1 1/8"	9W	540lm	>0.9
LED-TI-24" 4K	24"	5"	1 1/8"	11W	600lm	>0.9
LED-TI-33" 4K	33"	5"	1 1/8"	13W	780lm	>0.9
LED-TI-42" 4K	42"	5"	1 1/8"	16W	950lm	>0.9