

Features

- White finish, wall or ceiling mount
- UL listed, lamps are DLC approved
- 3500k, 4000k & 5000k
- 0-10v Dimming option
- Available in 2' or 4'

Specifications

- 120-277v ballasts are thermally protected Class P, non-PCB and UL listed. And sound rated "A".
- Housings are formed from cold rolled steel and painted with a high-gloss, baked white enamel finish after multi-stage cleaning and a phosphate coating to inhibit rust, has been applied.
- Fixture is designed for wall or ceiling mount.
- Installed LED lamps operate from electronic ballast.
- Standard diffuser is 100% virgin acrylic.

Application

- Commercial/Residential
- Corridors
- Bathrooms
- Hospitals
- Elder care facilities
- Hotel and motel facilities



Accessories/Options

- Emergency battery pack
- Dual level wiring
- 0-10v dimming





Catalog Number	Type

LED 900 Series

Dimensions are subject to change.
Consult factory for verification.
All configurations may not be shown.

Dimensions

Back View

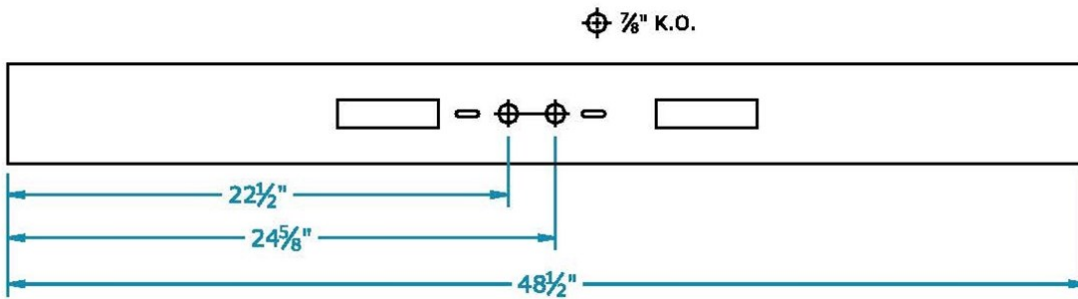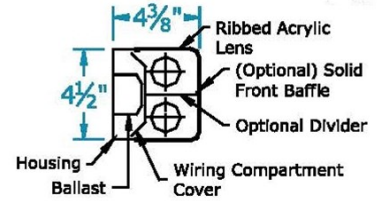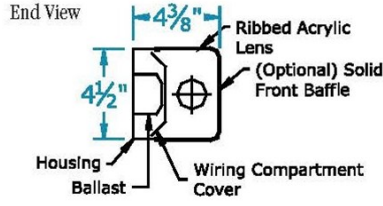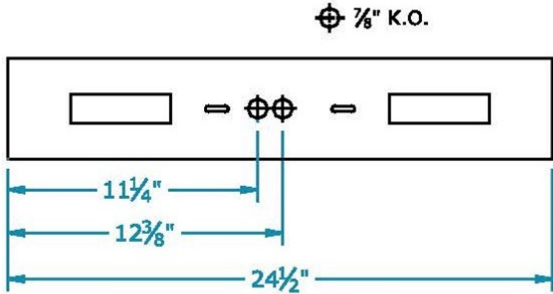

AVERAGE SYSTEM WATTS

INITIAL LUMENS PER LAMP

COLOR TEMP (k) Lamp length	AVERAGE SYSTEM WATTS			INITIAL LUMENS PER LAMP		
	LOW BALLAST FACTOR (0.78)	NORMAL BALLAST FACTOR (0.88)	HIGH BALLAST FACTOR (1.18)	LOW BALLAST FACTOR (0.78)	NORMAL BALLAST FACTOR (0.88)	HIGH BALLAST FACTOR (1.18)
2' 3500k	8 w	9 w	13 w	950	1100	1600
2' 4000k	8 w	9 w	13 w	950	1100	1600
2' 5000k	8 w	9 w	13 w	950	1100	1600
4' 3500k	15 w	18 w	23 w	1800	2200	2800
4' 4000k	15 w	18 w	23 w	1800	2200	2800
4' 5000k	15 w	18 w	23 w	1800	2200	2800

Ordering Information

Example: LED4K-902-32 XV

