

## Features

---

- White finish, surface or chain mount
- 4' & 8' lengths available
- Aesthetic appearance for Semi industrial applications
- UL listed, LED lamps are DLC approved
- 3500k, 4000k & 5000k

## Specifications

---

- 120-277v ballasts are thermally protected Class P, non-PCB and UL listed. And sound rated "A".
- Housings are formed from cold rolled steel and painted with a high-gloss, baked white enamel finish after multi-stage cleaning and a phosphate coating to inhibit rust, has been applied.
- Fixture is designed for surface, cable or chain mounting.
- Perforated metal basket with opal overlay
- Installed LED lamps operate from instant start ballast.

## Application

---

- Commercial/Residential
- Warehouses
- General Lighting
- Garages
- Retail

## Options

---

- Dual level wiring
- 3500k, 4000k, 5000k
- 0-10v Dimming



## Accessories

---

- Emergency battery pack
- Cable hanging kits
- V-hooks

Catalog Number	Type



# LED Bayfield Series

4' OR 8' CHANNELS


Dimensions are subject to change.  
Consult factory for verification.  
All configurations may not be shown.

## Dimensions

Back View

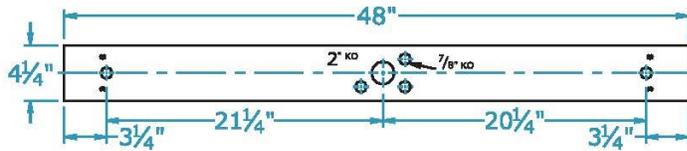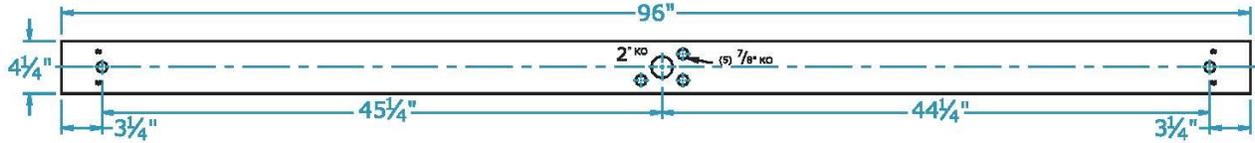

End View



## LED T8 LAMPS

COLOR TEMP (k) Lamp length	AVERAGE SYSTEM WATTS			INITIAL LUMENS PER LAMP		
	LOW BALLAST FACTOR (0.78)	NORMAL BALLAST FACTOR (0.88)	HIGH BALLAST FACTOR (1.18)	LOW BALLAST FACTOR (0.78)	NORMAL BALLAST FACTOR (0.88)	HIGH BALLAST FACTOR (1.18)
3500k	15 w	18 w	23 w	1800	2200	2800
4000k	15 w	18 w	23 w	1800	2200	2800
5000k	15 w	18 w	23 w	1800	2200	2800

## Ordering Information

Example: LED4K-BAY-M-232 XV

