

# LED CTL Highbay

**17,000 lumen highbay**

## Features

---

- Low profile design
- Commercial-grade
- ETL listed, DLC listed
- CCT 5000k
- 0-10V Dimmable
- 17,000 lumens / 50,000 hours

## Specifications

---

- 120-277v standard.
- Long life LEDs coupled with 120-277v high efficiency drivers provide quality illumination. Rated to deliver 50,000 hours at 114 lumens/watt.
- Non-corrosive powder coated steel body.
- 150w / 60Hz. / THD 10%
- CRI > 80. Power factor <0.90
- Operating temperature -4° to +104° F
- Specular reflector

## Application

---

- Gymsnasiums
- Retail Stores
- Warehouses



## Accessories

---

- Occupancy sensors
- 16w 90 min. 1200 lumen battery pack
- Lens cover





Catalog Number	Type

# LED CTL Highbay

17,000 lumen highbay

## Dimensions


Dimensions are subject to change.  
Consult factory for verification.  
All configurations may not be shown.

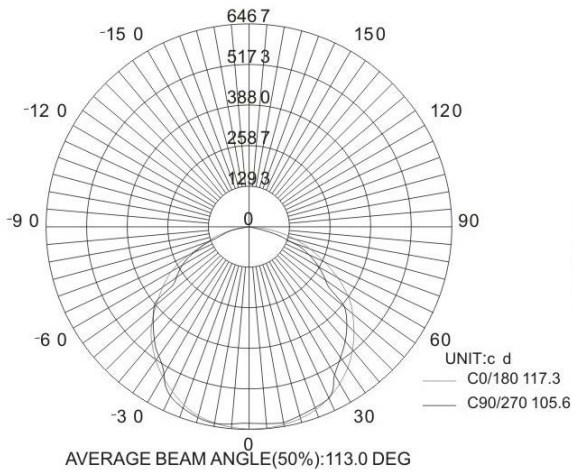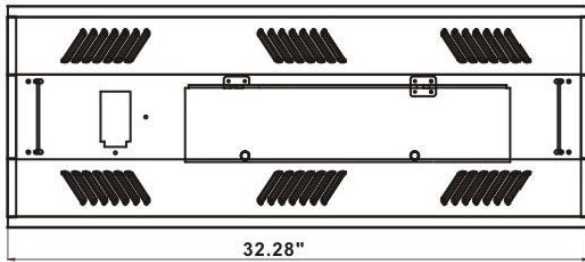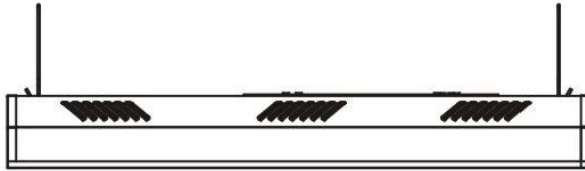

Height	AVR E	CENTER E	Diameter
2.00m	588.29LX	1616.56LX	525.37cm
4.00m	147.07LX	404.14LX	1050.73cm
6.00m	65.37LX	179.62LX	1576.10cm
8.00m	36.77LX	101.04LX	2101.46cm
10.00m	23.53LX	64.66LX	2626.83cm

Angle:105.4deg

## Ordering Information

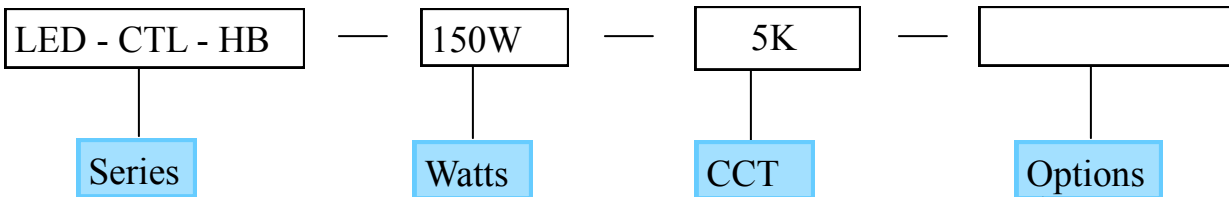

- OCC Occupancy Sensor
- EM 90 MIN. 1200L Battery Pack
- LENS Door Frame with Diffused Lens

