

Features


- Easy fit polycarbonate lens
- 50,000 hours life
- ETL listed, DLC listed
- Available in 4000k & 5000k
- 0-10V Dimmable

Specifications

- 120-277v standard.
- Long life LEDs coupled with 120-277v high efficiency drivers provide quality illumination. Rated at 50,000 hours. CRI>80 / 50/60Hz.
- White painted steel housing with knockouts provided on end and back of housing. Provided mounting provisions.
- Average of 110 lumens per watt.
- White polycarbonate lens.
- Designed surface, cable or chain mounting
- Operating temperature -4° to +104° F

Application

- General lighting
- Retail Stores
- Warehouses

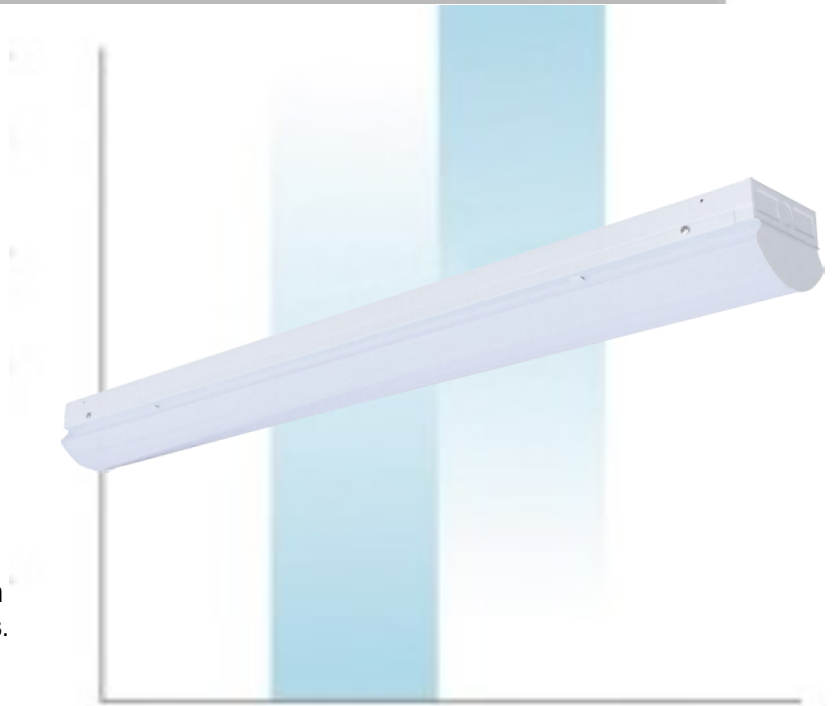

Accessories

- Emergency battery pack
- V-hooks

Catalog Number	Type


LED CTL Covered Strip Light

4' or 8'

Dimensions are subject to change.
Consult factory for verification.
All configurations may not be shown.

Dimensions

A	B	C
45 11/16"	4 7/16"	3 9/16"
90 3/4"	4 7/16"	3 9/16"

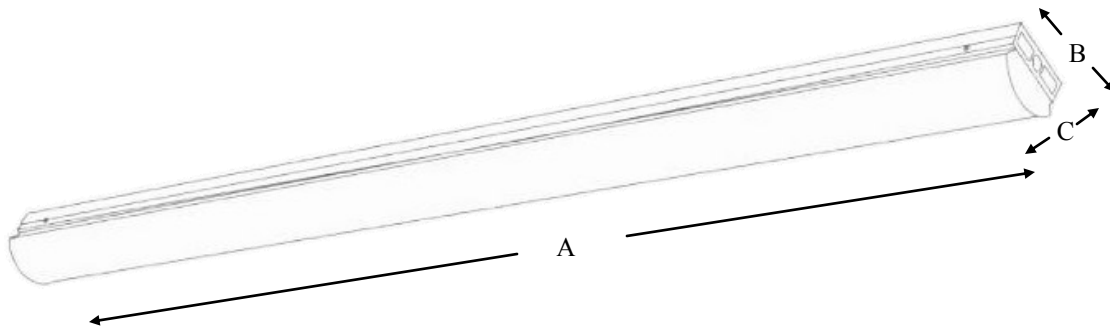

Length	Lumens	Watts
4'	4400 lm	40w
8'	7100 lm	63w

Ordering Information

Example: LED-CTL-LS-4840W-4K

