

## Features

---

- Sustainable illumination
- Commercial-grade, recessed, lay-in T-bar luminaire
- 2x2 & 2x4 configuration
- UL listed, DLC listed
- Available in 3500k, 4000k & 5000k
- 0-10V Dimmable

## Specifications

---

- 120-277v standard.
- Long life LEDs coupled with 120-277v high efficiency drivers provide quality illumination. Rated to deliver L80 performance > 50,000 hours at > 100+ lumens/watt.
- Die-formed, cold rolled heavy gauge steel housing assembly. Dome style steel reflector. Wiring access plate and knockouts are provided on back of housing. .
- Polyester powder painted matte white finish is standard.
- White plastic diffuser is standard.
- Designed for recessed applications.
- Operating temperature -4° to +104° F

## Application

---

- Schools
- Retail Stores
- Offices
- Hospitals
- Nursing Homes



## Accessories

---

- Flange kits for drywall applications
- 90 min. 1200 lumen battery pack

Catalog Number	Type


# Gallium Architectural LED Troffer

Recessed Static T-Bar Luminaire

Dimensions are subject to change.  
Consult factory for verification.  
All configurations may not be shown.


## Dimensions

Back View

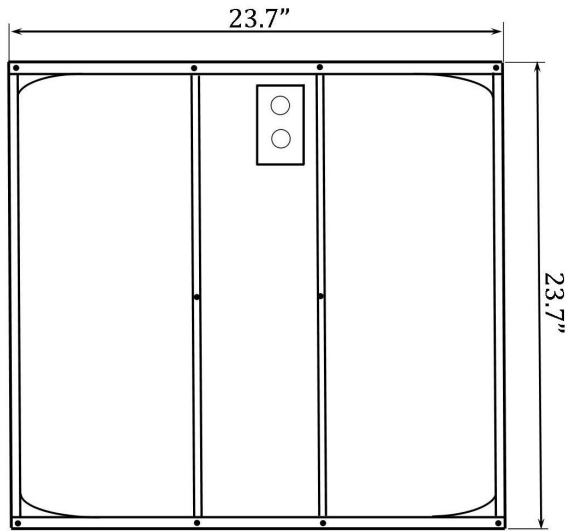


2x2

2x4

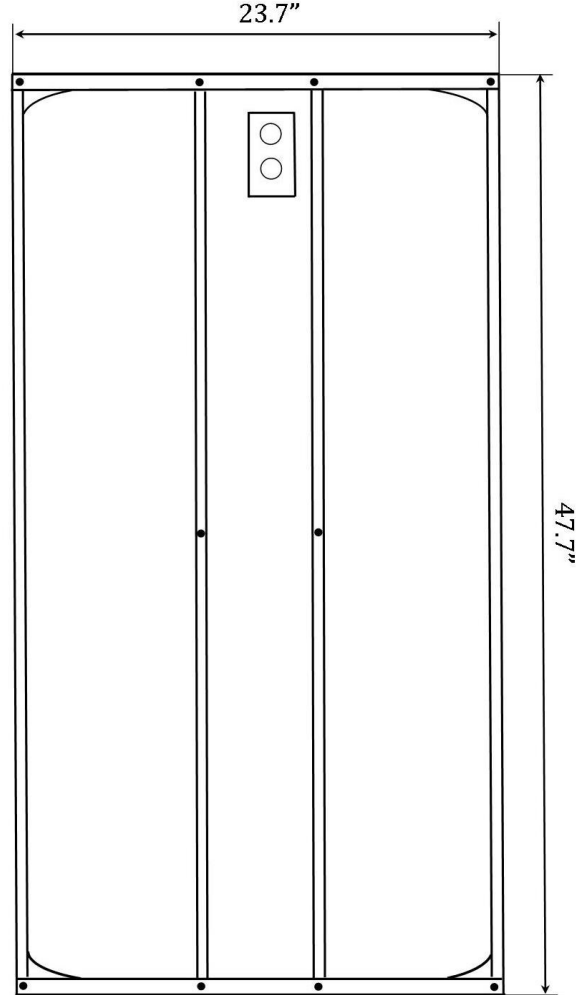

End View



Size	Luminous Flux	Watts
2x2	3600 lm	36w
2x4	5000 lm	50w

## Ordering Information

Example: LED-GA-24-50W-4K

