


## Features

- 9", 11" & 16" wide
- Lift and shift lens mounting from either side
- UL listed
- 0-10v Dimming option

## Specifications

- Ballasts are thermally protected class P, non-PCB & UL listed. Electronic ballasts are sound rated A. Multi volt 120v-277v 0° F ballast T8 & T5, -20° F T5HO.
- Housings are formed from cold rolled steel and painted with a high-gloss, baked white enamel finish after multi-stage cleaning and a phosphate coating to inhibit rust, has been applied.
- Fixture is designed for ceiling mount.
- Diffuser is 100% virgin acrylic that is of a lift and shift design for easy servicing.

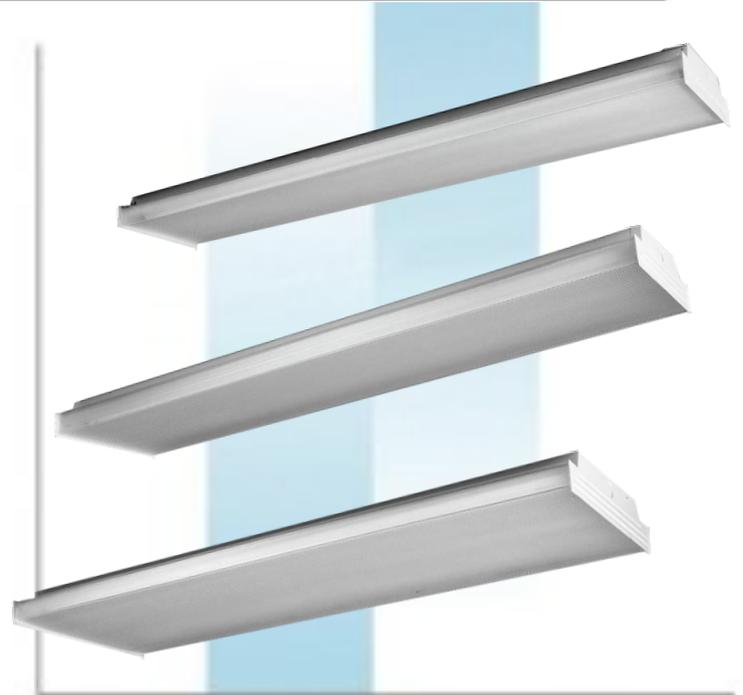

## Application

- Commercial/Residential
- Offices
- Kitchens
- General Lighting

## Accessories

- Emergency battery pack


Catalog Number	Type

# 200/400 Wrap Series

Fluorescent wrap fixture

Dimensions are subject to change.  
Consult factory for verification.  
All configurations may not be shown.

## Dimensions

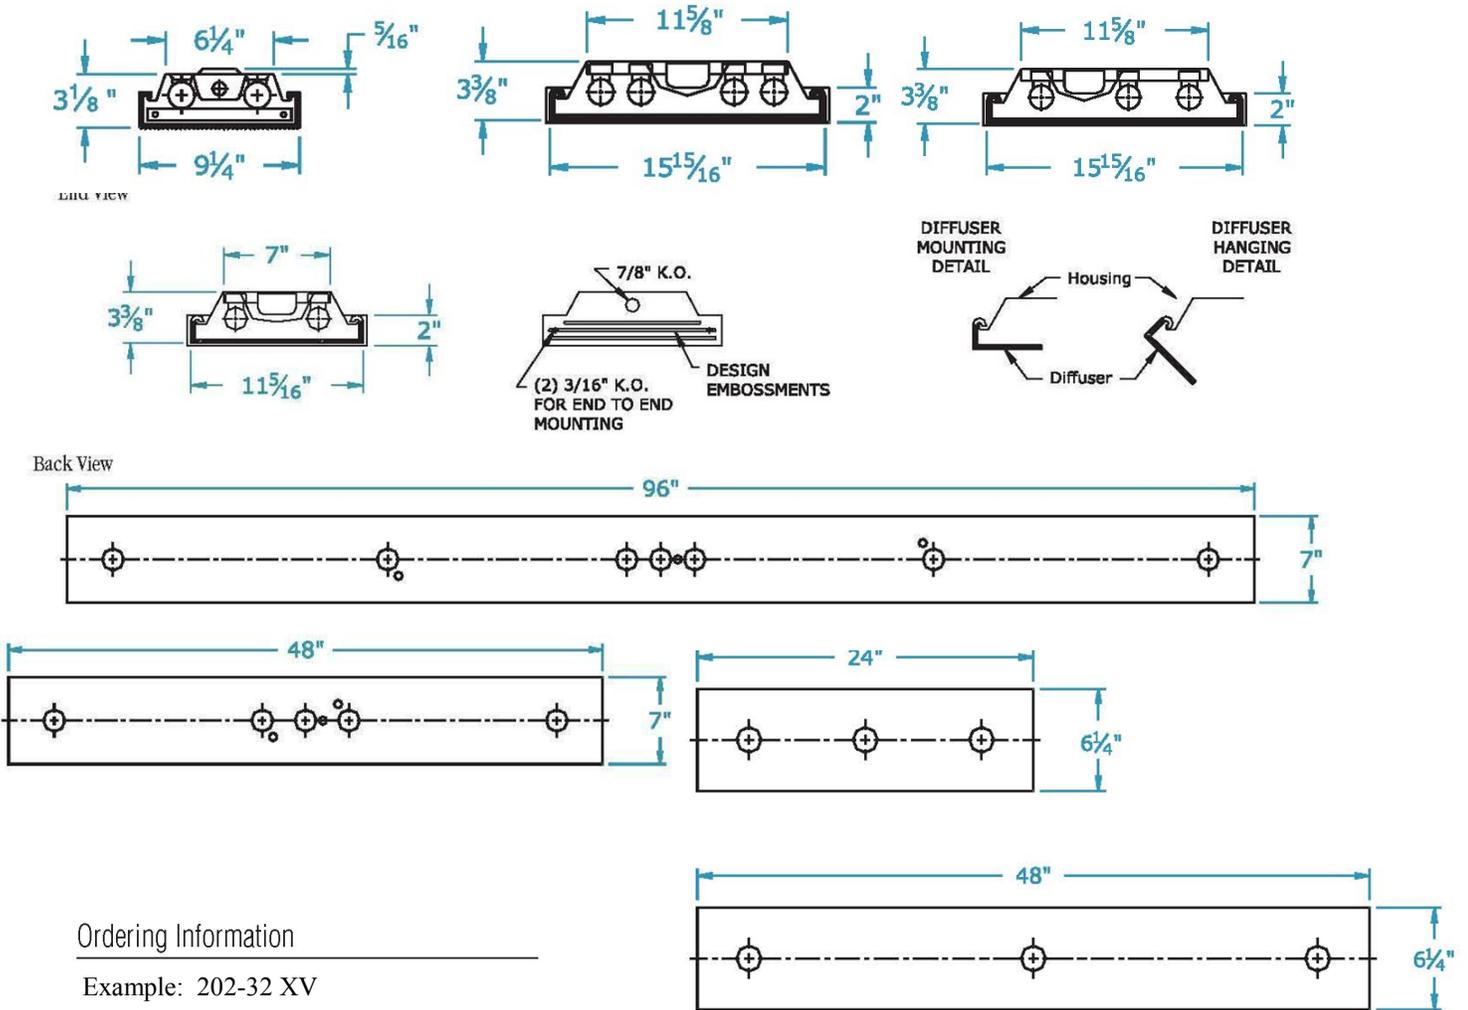

## Ordering Information

Example: 202-32 XV

202-17	2 lamp 9"x 2' T8
202-32	2 lamp 9"x 4' T8
402-25	2 lamp 11"x 3' T8
402-32	2 lamp 11"x 4' T8
402-28 T5	2 lamp 11"x 4' T5
402-54 T5HO	2 lamp 11"x 4' T5HO
403-32	3 lamp 16"x 4' T8
404-32	4 lamp 16"x 4' T8
404-28 T5	4 lamp 16"x 4' T5
404-54 T5HO	4 lamp 16"x 4' T5HO
4T4-32-8	4 lamp tandem 11" x 8'

