

LED Lamped Cloud 9 Mushroom

Ballast driven LED Lamped Cloud fixture

Features

- 5 sizes available
- Translucent curved acrylic diffuser
- UL listed, ballast driven lamps are DLC approved
- 3500k, 4000k & 5000k
- 0-10v Dimming option

Specifications

- 120-277v ballasts (standard) are thermally protected Class P, non-PCB and UL listed. And sound rated "A".
- Housings are formed from cold rolled steel and painted with a high-gloss, baked white enamel finish after multi-stage cleaning and a phosphate coating to inhibit rust, has been applied.
- Fixture is designed for ceiling mount.
- Installed LED lamps operate from electronic ballast.
- Diffuser is 100% virgin acrylic that is of a lift and shift design for easy servicing.



Application

- Commercial/Residential
- Offices
- Kitchens
- General Lighting

Accessories

- Emergency battery pack


Catalog Number	Type

LED Lamped Cloud 9 Mushroom


Ballast driven LED lamped cloud fixture

Dimensions are subject to change.
Consult factory for verification.
All configurations may not be shown.


Dimensions




2 Lamp
9"x 4"

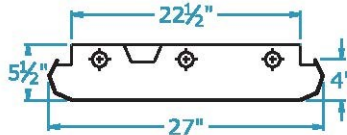


3 Lamp 2X4

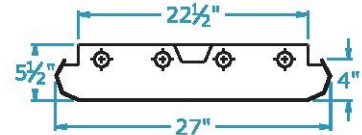

4 Lamp 2X2 and 2x4

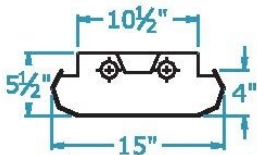

2 Lamp 1X4

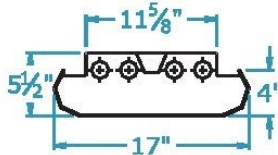

4 Lamp
16" X 4"

Fixture Size	Fixture Length	OA Length	OA Width
09	48"	52"	11.5"
14	48"	52"	15"
22	24"	27.5"	27"
164	48"	52"	17"
24	48"	52"	51.5"

LED T8 LAMPS

AVERAGE SYSTEM WATTS

INITIAL LUMENS PER LAMP

COLOR TEMP (k)	LOW BALLAST FACTOR (0.78)	NORMAL BALLAST FACTOR (0.88)	HIGH BALLAST FACTOR (1.18)	LOW BALLAST FACTOR (0.78)	NORMAL BALLAST FACTOR (0.88)	HIGH BALLAST FACTOR (1.18)
2' 3500k	8 w	9 w	13 w	950	1100	1600
2' 4000k	8 w	9 w	13 w	950	1100	1600
2' 5000k	8 w	9 w	13 w	950	1100	1600
4' 3500k	15 w	18 w	23 w	1800	2200	2800
4' 4000k	15 w	18 w	23 w	1800	2200	2800
4' 5000k	15 w	18 w	23 w	1800	2200	2800

Ordering Information

Example: LED4K-C9M-09-232 XV

